




| Accessories | Part Number | |
|---|----------------------------------|--|
| Pump Fittings Intake Fitting Flange to Bauer Discharge Fitting Flange to Bauer | (SY/H) 3194036 (SY/H) 3194033 | |
| Pump Fitting Gasket | (SY) 5004182 | |
| 3 Metre Suction Hose Assembly Weight 36.08 kg Typical Vacuum pressure 0.8 bar Working Pressure 10 bar Minimum Bend Radius 912 mm | (SY/H) 3194642 | |
| 6 Metre Delivery Hose Assembly Weight 35.18 kg Working Pressure 10 bar | (SY/H) 3194655 | |
| Layflat Delivery Hose Length 1 - 100 m Weight 1.25 kg/m Working Pressure 3 bar | (SY/H) 3194693 | |
| Hose Connections Ball Connector Socket Connector | (SY/H) 3194506 (SY/H) 3194507 | |
| Lever Closure Ring | (SY/H) 3194623 | |
| Rubber Sealing Ring | (SY/H) 3194284 | |
| Hose Intake Assembly | (SY/H) 1812040 | |

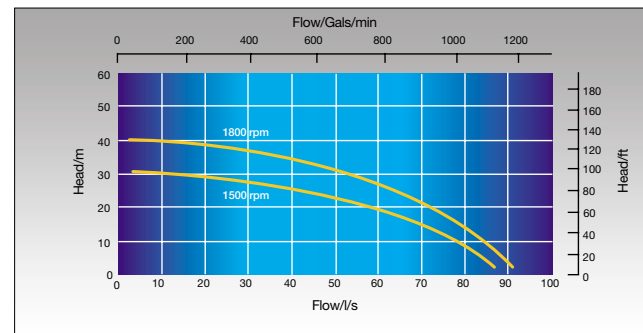

| | |
|--|---|
| Performance | Max head: 40 m / Max flow: 91 l/s / Max solid: 52 mm |
| Weight | 1112 kg with fuel 1000 kg without fuel |
| Dimensions HxWxL (mm) Typical Length including tow bar | 1300 x 1400 x 2620 3300 mm |
| Noise Level | Typical noise level at 1m dBA = 85 - 87 Typical noise level at 7m dBA = 68 - 70 |
| Fuel Tank Capacity | Tank Capacity 130 litres/ Cleaning and Flushing Facility |
| Fuel Consumption | Typical fuel consumption on full load @ 1800 rpm: 6 litres/hour |
| Chassis | 4 wheel site trailer / High speed trailer / Skid mounted |
| Canopy | Unique "airflow" grp canopy |
| Pump Materials | Main pump: SG grade iron |
| Pipe Connections | Suction: 150 mm NP10 / Discharge: 150 mm NP10 Bauer couplings option: 6" |
| Engine Type / Power / Speed | Lister LPWT4 / 23.8 kW / 1800 rpm |
| Prime System | Flood Lubricated Rotary Vacuum Pump/ Nominal Displacement 25 cfm/ Non Return Valve |
| Shaft Seal | Sykes patented Vacuum pressure seal Single ring of packing Spring loaded No adjustments necessary Easy repacking Chrome oxide coating on wear ring |
| Health and Safety | Gloves / Boots/safety footwear Protective clothing / Noise power level Lwa: 95 dB |